



125 "Ovunque"

Years produced: 1951 - 1954

Production: approx. 10,000

Selling price: 136,000/145,000 Lire

The "Ovunque" was developed with cost reduction in mind in order to lower its selling price as much as possible. The main characteristic of the Ovunque is the single beam frame. The engine has a 3 speed gearbox with a handlebar mounted gear shift. The suspension was simplified as well. Two versions were produced: the O51 with a single exhaust, and the O52 with a double exhaust as on the O53 and O54.

Technical Specification

ENGINE

Cylinders / Cycle: single / 2 stroke

Displacement: 123 cc

Bore x stroke: 53 x 56 mm

Compression ratio: 6:1

Power / rpm: 5 HP / 4800

Torque / rpm: NA

Cooling: air

Distribution: flat piston

Carburettor: 17 mm carburettor

Ignition: flywheel magneto

Lubrication: 6% mixture

Starting: kickstart

Primary drive: gear

Clutch: wet multiple plate clutch

Gearbox: 3 speeds

Final drive: chain

CHASSIS

Frame: tubular and pressed steel step-through frame

Front suspension: trailing link

Rear suspension: swingarm integrated with engine

Front brake: 125 mm drum

Rear brake: 125 mm drum

Front tire: 3.50x8"

Rear tire: 3.50x8"

Wheels: disc

Tank: 7 litres

Length: 1570 mm

Width: 690 mm


Wheelbase: 1240 mm

Weight: 76 Kg

PERFORMANCE

Top speed: 80 Km/h

Consumption: 34 Km/l

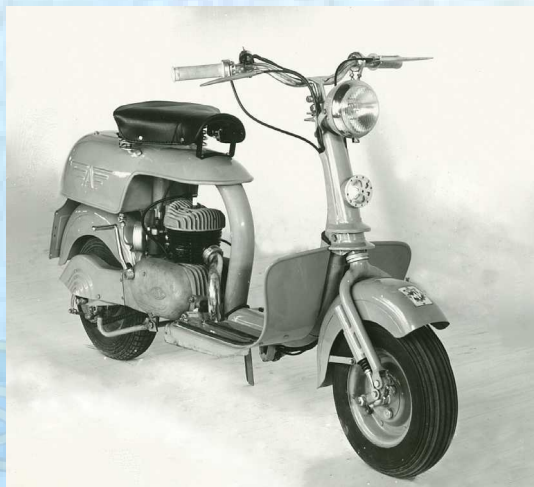

MV 125 Scooter 051 - 1951



MV 125 Scooter 052 - 1952